

# Selwood Positive Displacement 'PD' Pump



# PD75



## Specification

Capacity	m <sup>3</sup> /h	30
Total Head	m	30.5
Max. Solids Size	mm	6
Self Priming Lift	m	8.8
Air Handling	l/s	3.77
Power Required	kW	2.5
Pump Speed Max.	rpm	1450
Pump Speed Min.	rpm	960
Inlet Port	mm	75
Outlet Port	mm	75
Fuel Tank Capacity*	ltrs	5.5
Fuel Consumption BEP	lt/hr	TBA

TBA - To be advised.

## Pump Materials

Pump Casing	Aluminium Alloy
Shaft	Mild Steel
Pump End Bearing	6305 2RS
Drive End Bearing	6305 2RS
Priming Method	Positive Displacement

## Prime Movers

Engines	Yanmar L48 Honda GX160
Electric motors available	
Hydraulic motors available	

## Standard Weights & Measures

Standard	Length	100cm
Wheeled	Width	64cm
	Height	69cm
	Dry Weight	95 kg
	Gross Weight	100 kg
(Pt No. 039003300N)	LWA	108

\* Open sets exclude fittings

## Optional Extras


- Stonecatcher
- Oil tolerant seals
- Viton seals
- Threaded connections
- Chalwyn valve
- Spark arrestor
- Static chassis

**Selwood Limited**, Bournemouth Road,  
Chandler's Ford, Eastleigh, Hampshire, SO53 3ZL. UK  
Tel: +44(0) 23 8025 0137 Fax: +44(0) 23 8027 1012  
E-mail: pumpsales@selwoodpumps.com  
Web: www.selwoodpumps.com



## Performance Curve

# PD75

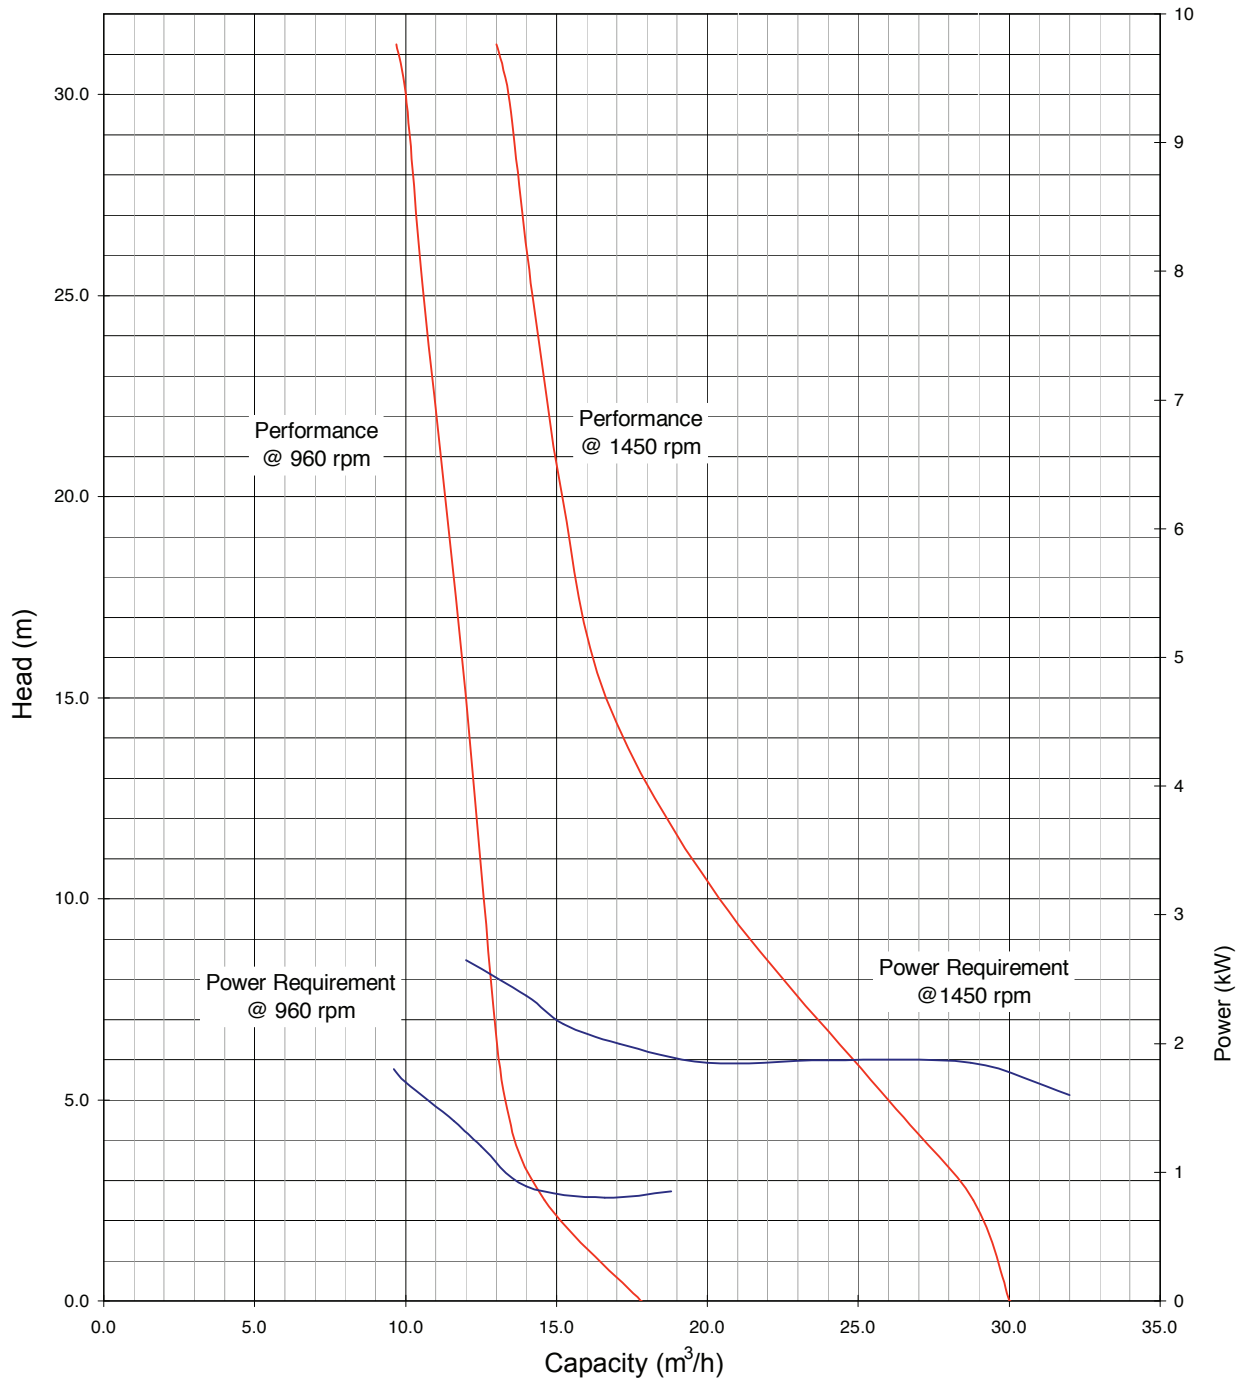

**Selwood Limited**, Bournemouth Road,  
 Chandler's Ford, Eastleigh, Hampshire, SO53 3ZL. UK  
**Tel:** +44(0) 23 8025 0137 **Fax:** +44(0) 23 8027 1012  
**E-mail:** [pumpsales@selwoodpumps.com](mailto:pumpsales@selwoodpumps.com)  
**Web:** [www.selwoodpumps.com](http://www.selwoodpumps.com)

**SELWOOD**  
[www.selwoodpumps.com](http://www.selwoodpumps.com)

